


CABLE(UT086,RG405,670-086,UT-0.085)

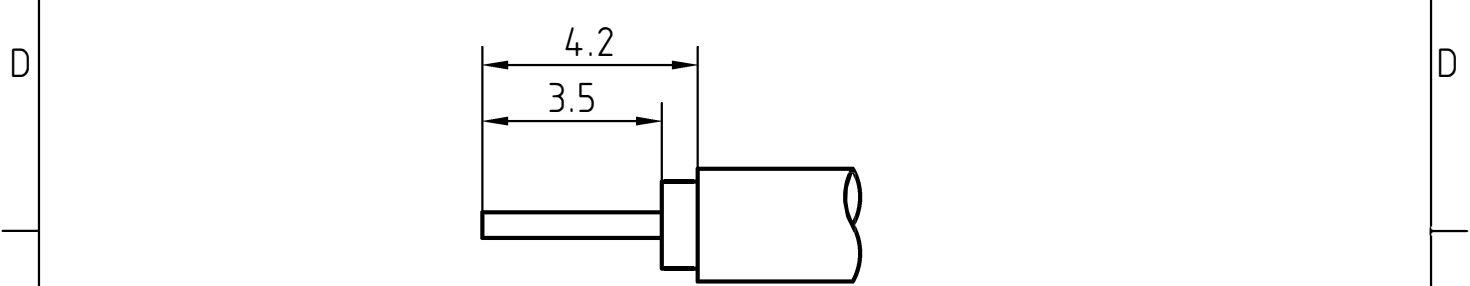

5	1	Coupling nut	Brass/Nickel plated	
4	1	O ring	Silicone rubber	
3	1	Body	Brass/SUCOplated	
2	1	Insulator	PTFE	
1	1	Center contact	Brass/Gold plated	

Itemref	Quantity	Title/Name, designation, material, dimension etc	Article No./Reference
---------	----------	--	-----------------------

Designed by Xio Xang	Checked by Jing Lo	Approved by - date Jing Chan	File name N-131100F	Date 06.02.20	Scale 3 : 1
-------------------------	-----------------------	---------------------------------	------------------------	------------------	----------------

	N-131100F	
	Edition 1.0	Sheet 1/1

CHARACTERISTICS

DESCRIPTION:

N Type male connector

Electrical data:

<i>Impedance:</i>	50 ohm
<i>Frequency range:</i>	DC to 11 GHz
<i>Return loss:</i>	≥28dB, DC to 2.5 GHz ≥23dB, 2.5 to 4 GHz ≥18dB, 4 to 8 GHz
<i>Insertion loss:</i>	≤0.05dB, DC-4GHz
<i>Insulation resistance:</i>	≥5000MΩ
<i>Test voltage:</i>	2500 V rms
<i>Working voltage:</i>	1400 V rms
<i>Contact resistance:</i>	
1). <i>Centre contact:</i>	1.0 mΩ
2). <i>Outer conductor:</i>	0.25 mΩ
<i>Power handling (at 20 ° C, sea level, VSWR 1.0):</i>	1000 W @ 1 GHz 700 W @ 2 GHz

Environmental data:

<i>Temperature rating:</i>	-55 ° C to +165 ° C
<i>2002/95/EC (RoHS):</i>	Compliant

Mechanical data:

<i>Mating cycles:</i>	≥500
<i>Center contact captivation:</i>	≥28N(axial)
<i>Coupling test torque:</i>	≤1.7 Nm
<i>Recommended torque:</i>	0.7 Nm to 1.1 Nm

Suitable cables:

UT086,RG405,670-086,UT-0.085