
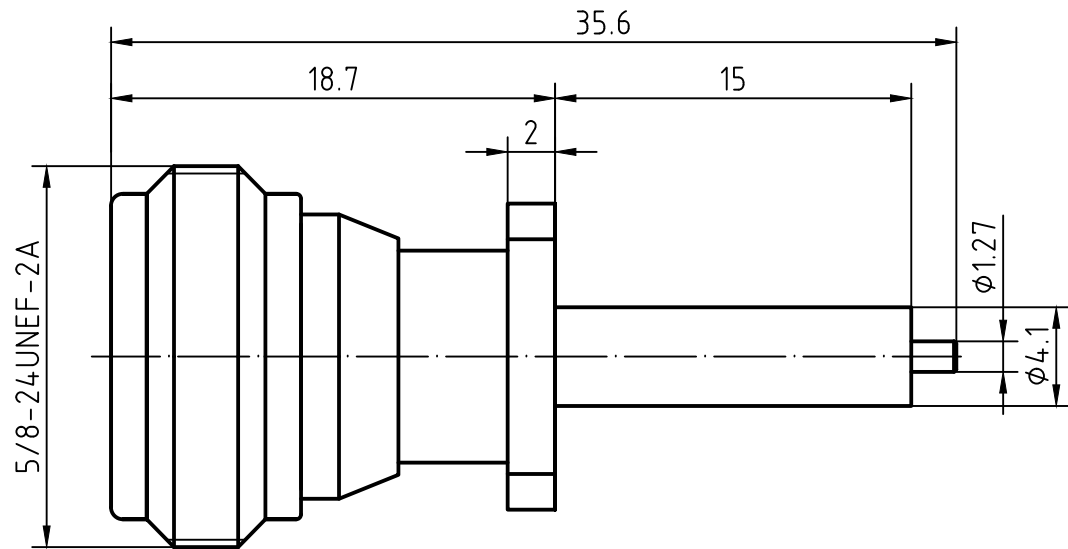


N-TYPE Straight panel receptacle jack, flange mount

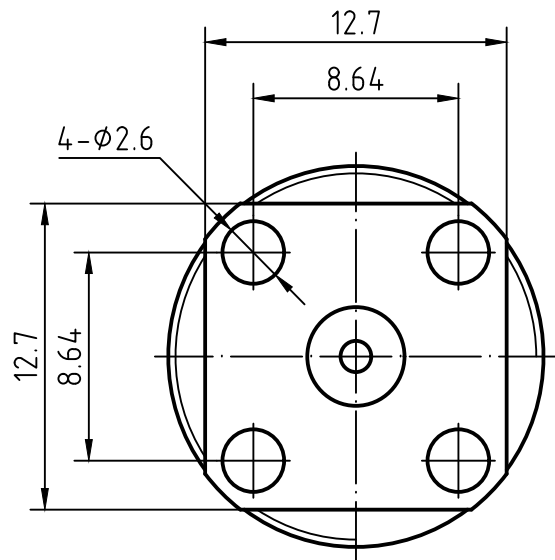

Electrical data:

Impedance: 50 ohm
Frequency range: DC to 11 GHz
Return loss: ≥ 35 dB, DC to 2.5 GHz
 ≥ 30 dB, 2.5 to 4 GHz
 ≥ 20 dB, 4 to 8 GHz
Insertion loss: $\leq 0.10 \times \sqrt{f[\text{GHz}]}$ dB
Insulation resistance: $\geq 5000\text{M}\Omega$
Test voltage: 2500 V rms
Working voltage: 1400 V rms
Contact resistance:
1). Centre contact: ≤ 1.0 m Ω
2). Outer conductor: ≤ 0.25 m Ω

Environmental data:

Temperature rating: -55 ° C to +155 ° C
2002/95/EC Compliant
(RoHS):

Mechanical data:

Mating cycles: ≥ 500
Center contact captivation: ≥ 27 N(axial)
 ≥ 3 Ncm(radial)
Coupling test torque: ≤ 1.7 Nm Recommended
torque: 0.7 Nm to 1.1 Nm

3	Body	Brass	Nickel plated
2	Insulator	PTFE	
1	Center contact	Phosphor bronze	Gold plated
Item No.	Description	Materials	Surface Plating
Designed	Scale	1 : 1	Description
Checked	SHEET	1/1	N Type female FL Connector(4 Holes)
			P/N
			Date
			N-232141(12.7)
			11.09.13