

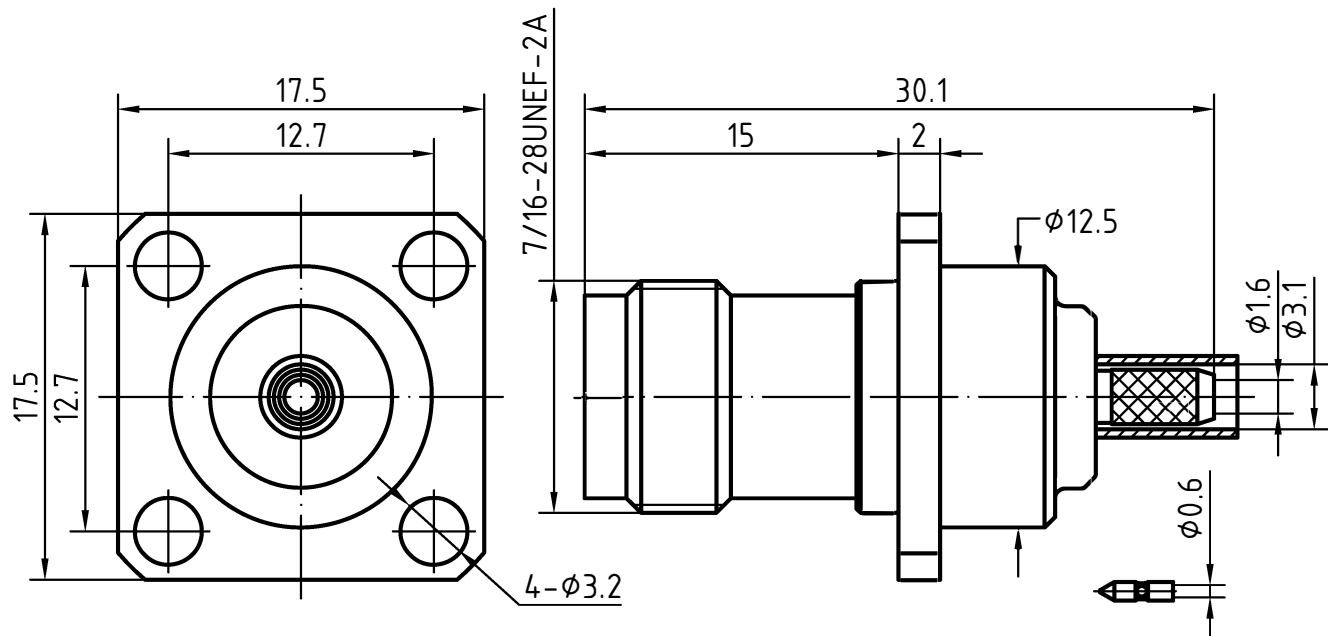


DRAWING

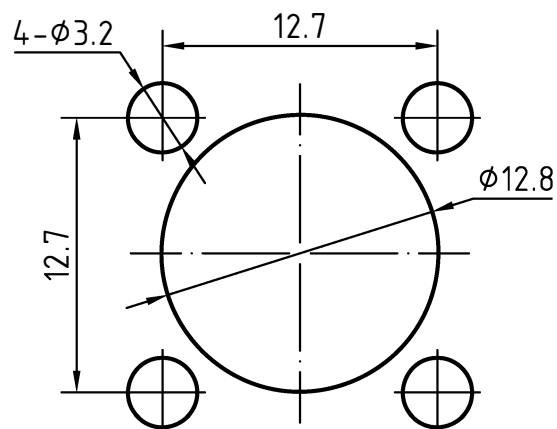

CABLE(RG174A/U,RG188A/U,RG316/U)

MOUNTING HOLE



3	1	Body	Brass/Nickel plated	
2	1	Insulator	PTFE	
1	1	Center contact	Phosphor bronze/Gold plated	
Itemref	Quantity	Title/Name, designation, material, dimension etc		Article No./Reference
Designed by Xio Xang	Checked by Jing Lo	Approved by Jing Chan	File name TNC-112140A	Date 08.02.12
		TNC-112140A		
		Edition 1.0	Sheet 1/1	

CHARACTERISTICS

DESCRIPTION:	TNC Type female FL connector
--------------	------------------------------

Electrical data:

Impedance:	50 ohm
Frequency range:	DC to 10.0 GHz
VSWR:	$\leq 1.10 + 0.05 \times f[\text{GHz}]$
Insertion loss:	$\leq 0.20 \times \sqrt{f[\text{GHz}]} \text{ dB}$
Insulation resistance:	$\geq 5000 \text{ M}\Omega$
Test voltage:	1500 V rms
Working voltage:	500 V rms
Contact resistance:	
1). Centre contact:	1.5 m Ω
2). Outer conductor:	1.0 m Ω
Power handling (at 20 ° C, sea level, VSWR 1.0):	$\leq 80 \text{ W @ } 2 \text{ GHz}$

Environmental data:

Temperature rating:	-65 ° C to +165 ° C
2002/95/EC (RoHS):	Compliant

Mechanical data:

Mating cycles:	≥ 500
Center contact captivation:	$\geq 15 \text{ N(axial)}$
Coupling test torque:	$\leq 1.7 \text{ Nm}$
Recommended torque:	0.46 Nm to 0.69 Nm

Suitable cables:

RG174A/U, RG188A/U, RG316/U