


T-BMBF-1G2W

BNC Plug To BNC Jack
Feed Through Termination

50Ω

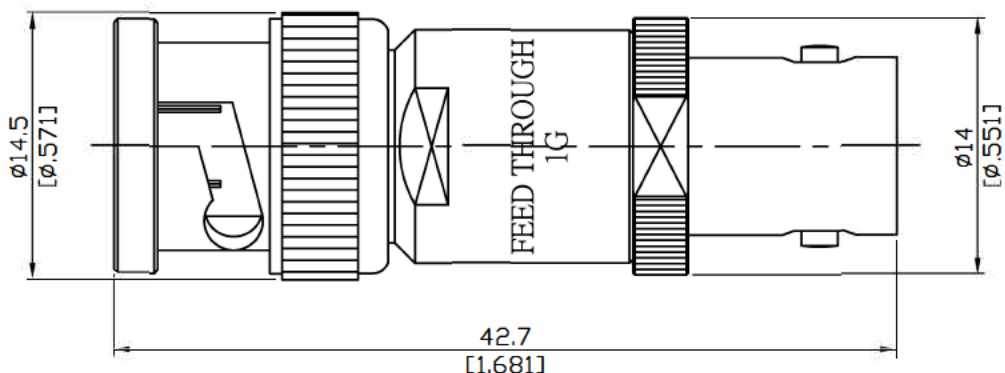

Matings > 500
Operating Temp : -55° C/ +155° C
Resistance Accuracy: 50±0.5Ω

Approved by Jing Chan

Connector 1		Connector 2		Frequency (GHz)	Impedance (Ohm)	Power (Watt)	VSWR		
Series	Male / Female	Series	Male / Female				0.1G	0.5G	1G
BNC	Male	BNC	Female	0 to 1GHz	50Ω	2W	≤ 1.1	≤ 1.25	≤ 1.3

Parts	Material	Plating (Micro-inch)
Insulator	Teflon	
Contact Pin	Phosphor Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Spring	SK5	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicone	
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50